


Single Color LED Controller Installation

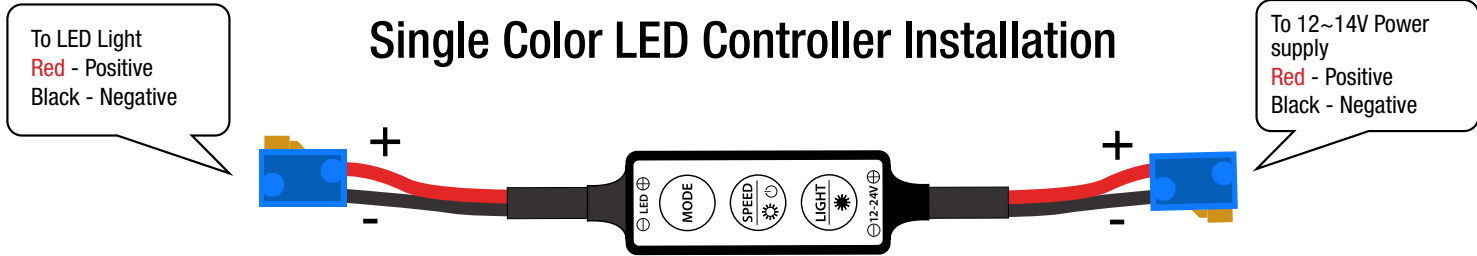

Installation: 1. Connect LED strip to LED output on the controller. 2. Connect power cable to 12~24VDC power supply as shown. Input voltage should match the voltage of the LED strip.

Key Functions: **MODE:** Press this key to switch between 8 dynamic modes. **SPEED/BRIGHTNESS - / POWER OFF:** Dynamic Mode - Quickly press to adjust the speed of the dynamic modes, 10 different speeds are available. Static Mode - Quickly press to adjust brightness, 10 levels of brightness are available. Power Off - Press and hold for about 1 second to switch controller off. Press any key to turn controller back on. On wake-up the controller will resume using the settings in use prior to power off. **LIGHT / BRIGHTNESS + :** Switches to Static Mode. Press to increase brightness. Press and hold key for 1 second to select max brightness.